



3 year guarantee

SWIVEL S

CE 0082 EAC

(EN) Swivel connector
(FR) Connecteur émerillon



94 g

WARNING

Activities involving the use of this equipment are inherently dangerous. You are responsible for your own actions and decisions.

- Before using this equipment, you must:
- Read and understand all Instructions for Use.
 - Get specific training in its proper use.
 - Become acquainted with its capabilities and limitations.
 - Understand and accept the risks involved.



FAILURE TO HEED ANY OF THESE WARNINGS MAY RESULT IN SEVERE INJURY OR DEATH.

NFPA CERTIFICATION FOR SWIVEL S P58S


THIS SWIVEL S MEETS THE AUXILIARY EQUIPMENT REQUIREMENTS OF NFPA 1983, STANDARD ON LIFE SAFETY ROPE AND EQUIPMENT FOR EMERGENCY SERVICES, 2012 EDITION. EMERGENCY SERVICES AUXILIARY EQUIPMENT IN ACCORDANCE WITH NFPA 1983-2012

T (TECHNICAL USE)
MEETS NFPA 1983 (2012 ED.)
MBS 23 kN



After removing the Instructions for Use from the equipment, make a copy of it and keep the original as part of a permanent record that includes the usage and inspection history for the equipment. Keep the copy of the Instructions for Use with the equipment and refer to it before and after each use. Additional information regarding auxiliary equipment can be found in NFPA 1500, Standard on Fire Department Occupational Safety and Health Program, and NFPA 1983, Standard on Fire Service Life Safety Rope and System Components.

Traceability and markings Traçabilité et marquage



CE 0082

- a. Body controlling the manufacture of this PPE
 - b. Notified body that carried out the CE type examination
- Apave Sudeurope SAS
9 rue Jean-Jacques Verazza
Z.A.C. Saumaty-Séon - CS 60193
13322 MARSEILLE CEDEX CEDEX 16
N°0082

c. Traceability: **datamatrix** = product reference + individual number

k. Carefully read the instructions for use

e. Individual number

00 000 AA 0000

- f. Year of manufacture
- g. Day of manufacture
- h. Control or name of inspector
- i. Incrementation

l. Model identification

PETZL
F-38920 Crolles
PETZL.COM
Made in Italy
ISO 9001 © Petzl



Sustaining our Community
Au service de la Communauté
FONDATION-PETZL.ORG

1. Field of application
Champ d'application

2. Strength
Résistance

Working load limit
Valeur d'utilisation maxi




5 kN

Breaking load
Charge de rupture




23 kN

3. Nomenclature
Nomenclature




4. Inspection, points to verify (text part)
Contrôle, points à vérifier (partie texte)



5. Compatibility (text part)
Compatibilité (partie texte)

6. Installing the swivel connector
Installation du connecteur émerillon

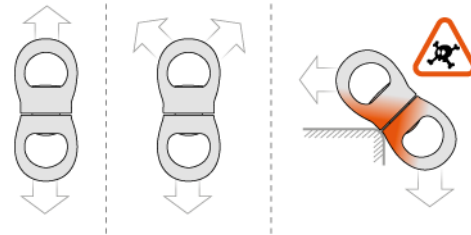


7. Additional information
Informations complémentaires

A. Lifetime / Durée de vie



unlimited
illimitée

B. Acceptable T°
T° tolérées



+ 80°C / + 176°F
- 40°C / - 40°F

C. Precautions for use / Précautions d'usage




D. Cleaning / Nettoyage



+ 30°C maxi.
+ 86°F maxi.

E. Drying / Séchage



+ 30°C maxi.
+ 86°F maxi.

F. Storage - Transport
Stockage - transport



+ 30°C / + 86°F
+ 10°C / + 50°F



G. Maintenance
Entretien



H. Modifications - Repairs
Modifications - Réparations



I. FAQ - Contact
Questions - Contact



